

BASKET MILL


COMPLETES ISO 9001:2000 SYSTEM CERTIFICATION



Characteristics:

Labor-saving is one of the best characteristics of this Basket Mill. It combines both mixing process and grinding process in one operation and within the same vessel. The processing time can be set by timer for optimal operation results without surveillances which relieve the burden of the experienced workers.

The grinding chamber loaded with fixed quantity of grinding beads. The surrounding and bottom side of the grinding chamber equips with meshed screen. Inside the grinding chamber, the upper section equips with bar type impeller which drives the grinding beads with required energy for mixing and dispersing. The bottom section equips with propeller type impeller which inhale the materials down. The flow of the materials first inhale into the grinding chamber from the top opening, after dispersing, the materials pass through the meshed screen for next dispersing. The repeating cycles successfully achieve its required fineness. Basket mills apply for viscosity under 5000cps.

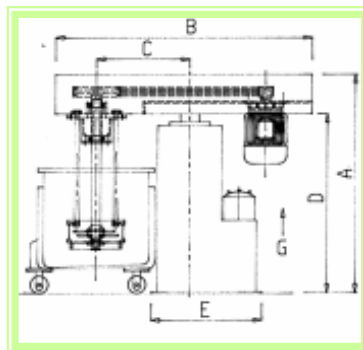

MODEL	Capacity (Liter)	Motor (HP/KW)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	G (mm)	Weight (KG)
HMD-20BK	200-350	20/15	2000	2200	800	1550	950×1000	800	2000
HMD-30BK	200-400	30/22.5	2000	2200	800	1550	950×1000	800	2100
HMD-50BK	300-600	50/37.5	2200	2400	1000	1700	1000×1200	950	2350



HWA MAW MACHINE INDUSTRIAL CO., LTD.

No.31-6, Lane 320, Sec 1, Sha Tien Road, Ta Tu Hsing, Taichung, Taiwan, R.O.C.
 TEL:886-4-26936333.(REP) FAX:886-4-26936222.

Web site:<http://www.hwamaw.com.tw> E-Mail:hwamaw@ms8.hinet.net